



CELETTE[®]

CAR LIFE SOLUTIONS

X-TRAC

07-06-2016




CELETTE

CAR LIFE SOLUTIONS


X-TRAC Overview

XT14.3800


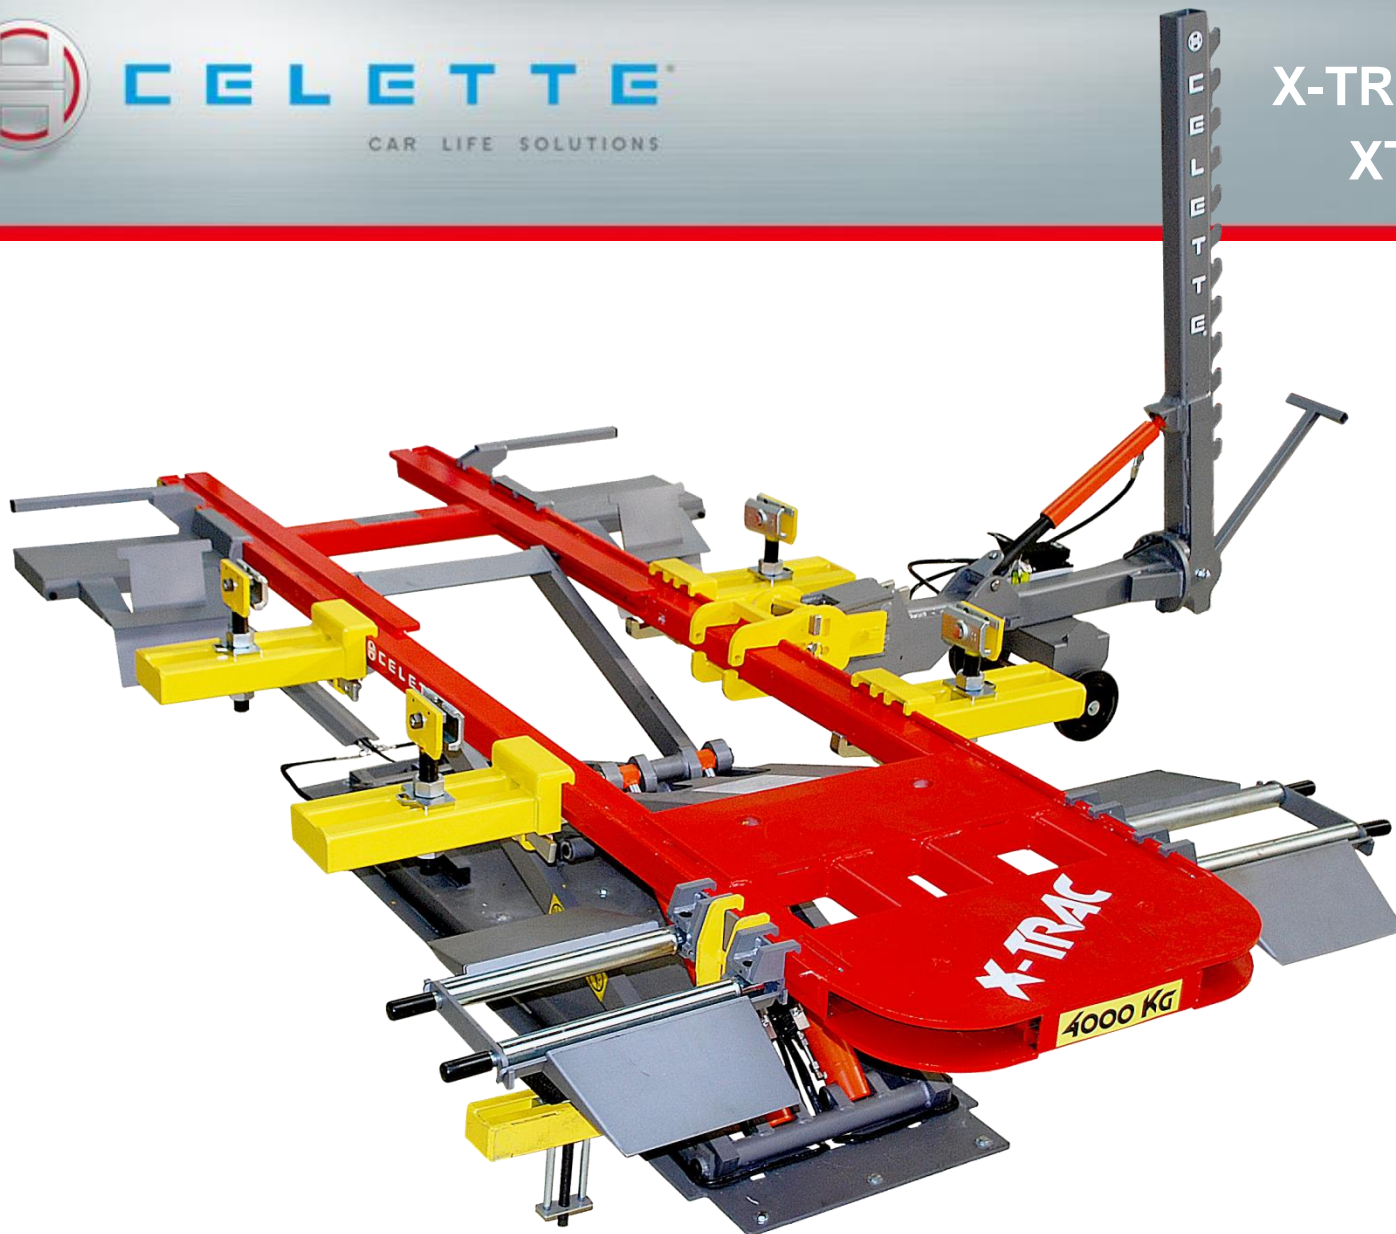




- Platform lifting height up to **1.4 m**.
- Its vertical ground obstruction has been reduced to **less than 105 mm**, ideal for low clearance vehicles.
- Its hydraulic combination of 2 double effect **10 tons** acting cylinders together with **hydraulic safety valves** allows a noise reduction for better comfort. **No mechanical security means no pneumatic energy.**

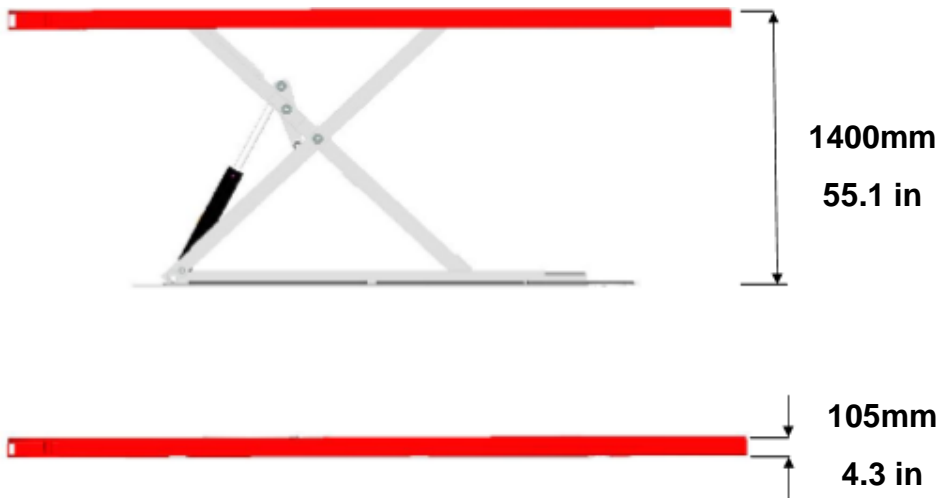

No Mechanical safety

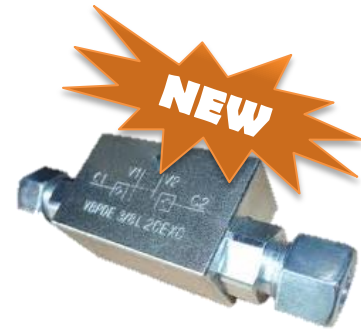


Only Hydraulic safety



CELETTE
CAR LIFE SOLUTIONS

Major technical innovations implemented on the new X-TRAC.

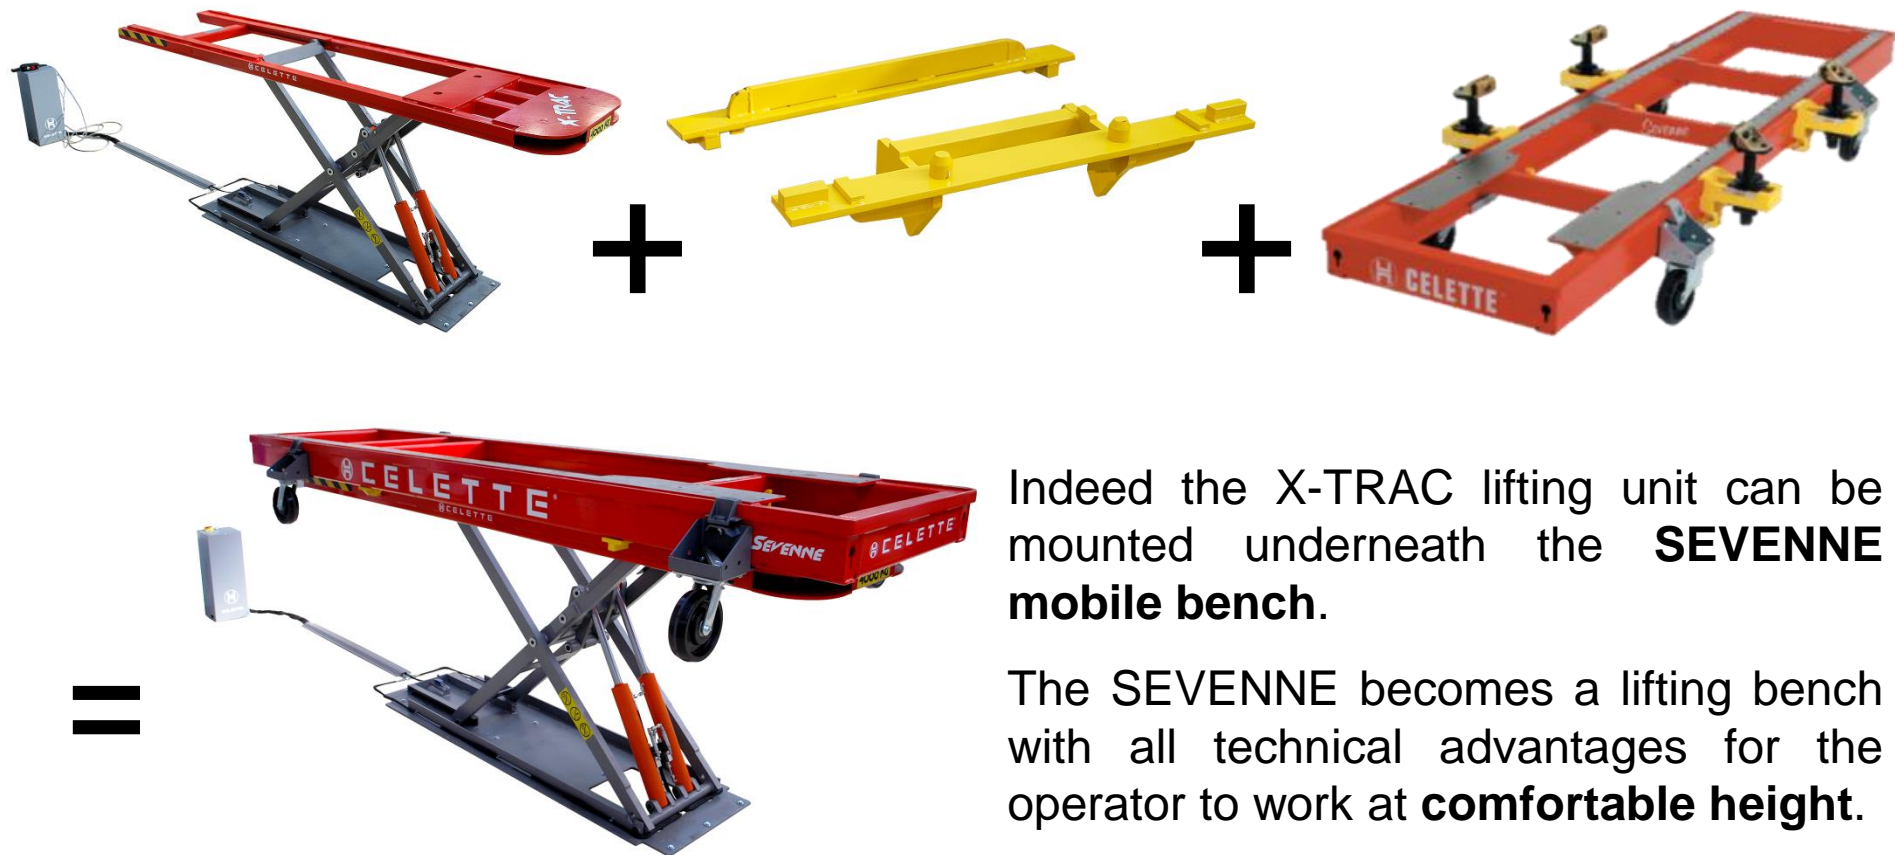

Indeed the X-TRAC lifting unit can be mounted underneath the **SEVENNE mobile bench**.

The SEVENNE becomes a lifting bench with all technical advantages for the operator to work at **comfortable height**.




Its lifting capacity is reaching **3000 kg** – lifting from ground / **4000 kg** lifting from rocker panels to meet new car manufacturer standards.

Within the lifting and straightening platform market segment, X-TRAC is becoming one of the best products for **lifting capacity, pulling and versatility.**

QUICK AND EASY SETUP MEANS PRODUCTIVITY AND PROFITABILITY.


Charge totale admissible répartie en 3/5 - 2/5 sur chaque essieu pour le levage :

- D'un véhicule par les roues : 3000KG / 6600Lbs

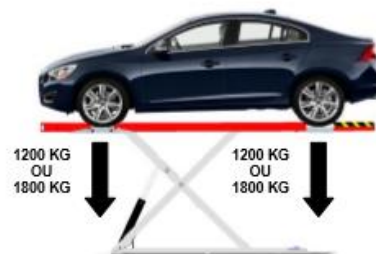


3000 Kg

- D'un véhicule par les bas de caisse : 4000KG / 8800Lbs

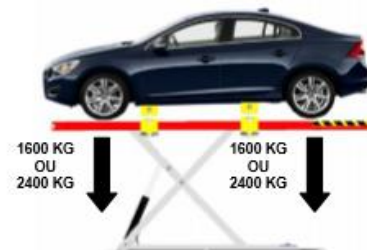

4000 Kg

- D'un marbre CELETTE, type Sevenne, avec un véhicule de : 2800KG / 6150Lbs

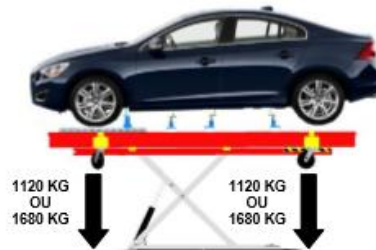

2800 Kg
(car weight)



CELETTE®

CAR LIFE SOLUTIONS

X TRAC Nordic

XT14.3500

Decking plates and ramps
can be mounted, X-TRAC
becomes **drive on**
platform.





CELETTE®

CAR LIFE SOLUTIONS

The car stands on 3 or 4 wheels, **no stress** on the vehicle structure.

Sill clamps can be mounted afterwards for quick pulls.

Patented wheel removing process.

1



2



3

